

## GPS Dielectric antenna VTCA1575R1840A

### 1. SCOPE


This specification shall cover the characteristics of the dielectric antenna element with the type VTCA1575R1840A

### 2 OUTLINE DRAWING AND DIMENSIONS

2.1 Appearance: No visible damage and dirt.

2.2 Except the pin, the materials don't contain lead.

2.3 Dimensions

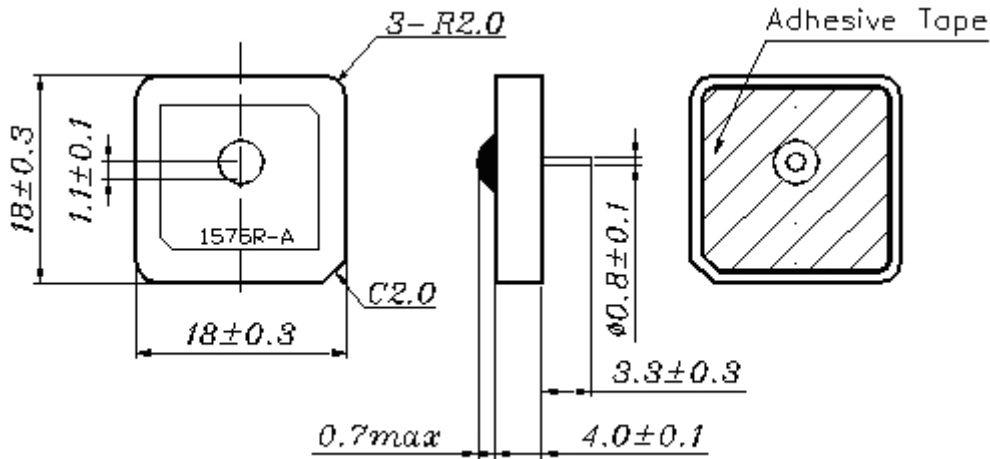


### 3 ELECTRICAL SPECIFICATIONS

#### 3.1 Performance Characteristics

Items	Content
Nominal frequency MHz	1593±2
*Center frequency MHz(with adhesive tape on square ground Plane)	CF±3.0
-10dB Bandwidth MHz min	8.0
Return Loss at Center Frequency dB max	-20.0
Gain (Zenith 90° ) dBi type	2.0
Polarization Model	RHCP
Impedance	50 Ω
Axial Ratio dB max	3.0
Frequency Temperature Coefficient	20ppm/deg.°C max

\* Center frequency :-10dB bandwidth center frequency.

## 4. Impedance Characteristic

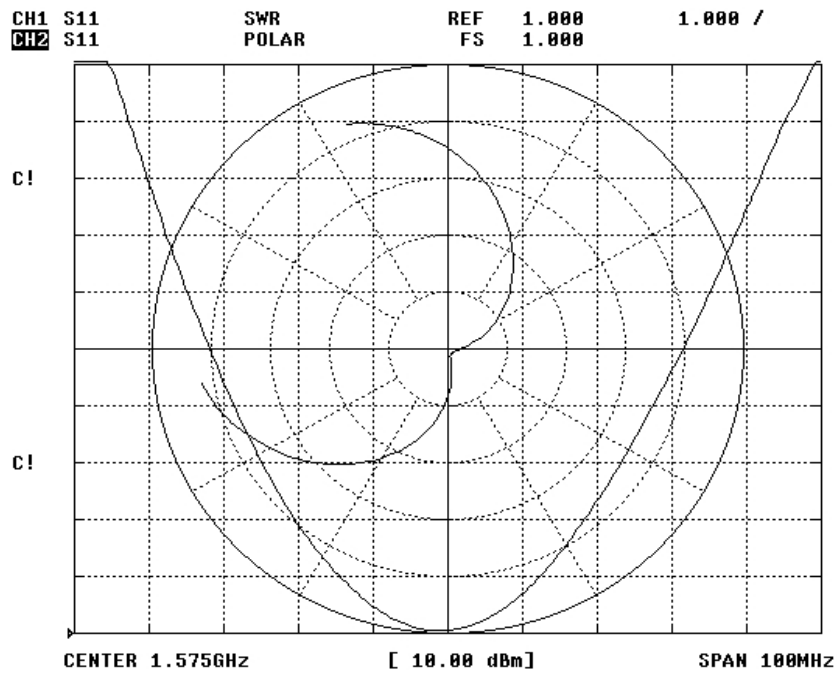


## 5. TEST

### 5.1 Test Conditions

Parts shall be measured under a condition (Temp.:  $20^{\circ}\text{C} \pm 15^{\circ}\text{C}$ , Humidity :  $65\% \pm 20\%$  R.H.).

### 5.2 Test Jig

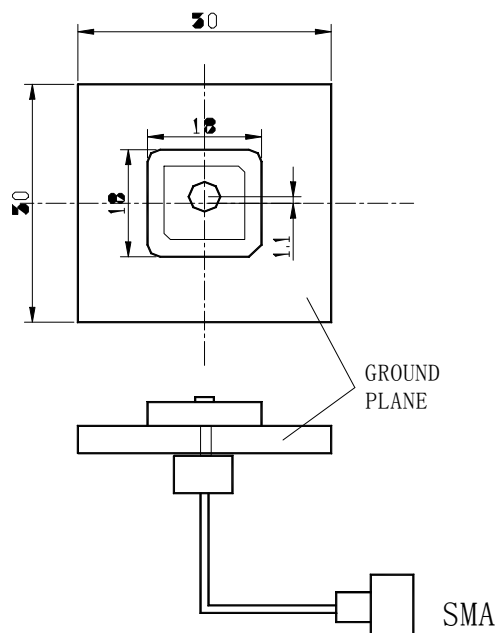

## 6.ENVIRONMENTAL TEST

No.	Item	Test Condition	Remark
6.1	Humidity Test	The device is subjected to 90%~95% relative humidity $60\text{ }^{\circ}\text{C} \pm 3\text{ }^{\circ}\text{C}$ for 96h~98h, then dry out at $25\text{ }^{\circ}\text{C} \pm 5\text{ }^{\circ}\text{C}$ and less than 65% relative humidity for 2h~4h. After dry out the device shall satisfy the specification in table 1.	It shall fulfill the specifications in Table 1.
6.2	High Temperature Exposure	The device shall satisfy the specification in table 1 after leaving at $105\text{ }^{\circ}\text{C}$ for 96h~98h, provided it would be measured after 2h~4h leaving in $25\text{ }^{\circ}\text{C} \pm 5\text{ }^{\circ}\text{C}$ and less than 65% relative humidity.	It shall fulfill the specifications in Table 1.
6.3	Low Temperature	The device shall satisfy the specification in table 1 after leaving at $-40\text{ }^{\circ}\text{C}$ for 96h~98h, provided it would be measured after 2h~4h leaving in $25\text{ }^{\circ}\text{C} \pm 5\text{ }^{\circ}\text{C}$ and less than 65% relative humidity.	It shall fulfill the specifications in Table 1.
6.4	Temperature Cycle	Subject the device to $-40\text{ }^{\circ}\text{C}$ for 30 min. followed by a high temperature of $105\text{ }^{\circ}\text{C}$ for 30 min cycling shall be repeated 5 times. At the room temperature for 1h prior to the measurement.	It shall fulfill the specifications in Table 1.
6.5	Vibration	Subject the device to vibration for 2h each in x、y and z axis with the amplitude of 1.5mm, the frequency shall be varied uniformly between the limits of 10Hz~55Hz.	It shall fulfill the specifications in Table 1.
6.6	Soldering Test	Lead terminals are heated up to $350\text{ }^{\circ}\text{C} \pm 10\text{ }^{\circ}\text{C}$ for $5\text{ s} \pm 0.5\text{ s}$ with brand iron and then element shall be measured after being placed in natural conditions for 1 h. No visible damage and it shall fulfill the specifications in Table 1	It shall fulfill the specifications in Table 1.
6.7	Solder ability	Lead terminals are immersed in soldering bath of $260\text{ }^{\circ}\text{C} \sim 290\text{ }^{\circ}\text{C}$ for $3\text{ s} \pm 0.5\text{ s}$ . More than 95% of the terminal surface of the device shall be covered with fresh solder.	The terminals shall be at least 95% covered by solder.
6.8	Terminal Pressure Strength	Force of 2kg is applied to each lead in axial direction for $10\text{ s} \pm 1\text{ s}$ (see drawing). No visible damage and it shall fulfill the specifications in Fig 1	Mechanical damage such as breaks shall not occur.

FIG 1

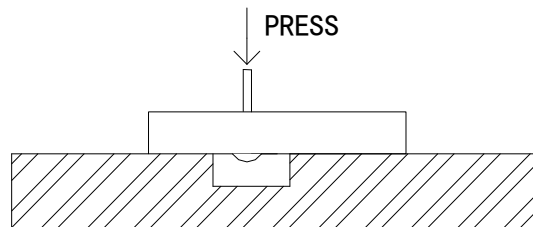


TABLE 1

Item	Specification After Test (MHz)
Center Frequency change	$\pm 2.0$
-10dB Bandwidth Change	$\pm 2.0$

## 7. PACKAGE

To protect the products in storage and transportation, it is necessary to pack them (outer and inner package). On paper pack, the following requirements are requested.

### 7.1 Dimensions and Mark

At the end of package, the warning (moisture proof, upward put) should be stick to it. Dimensions and Mark (see below)